


BF BATTEN

LED SURFACE BATTEN FITTING

A traditionally styled surface batten fitting, available in a wide range of outputs and sizes. Easy to install with emergency options

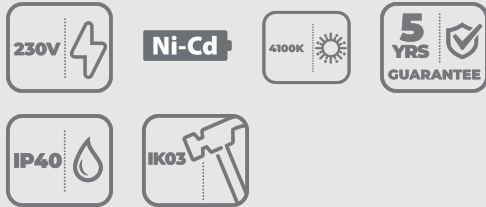

Features

- Traditionally styled batten
- Covers BESA boxes, ideal for retro fit
- 1500mm twin fitting
- Opal diffuser
- Suitable for corridors and large spaces



Specification

Code	Description	Lumen Output	Emergency Lumen Output	Wattage	Efficacy
BF660WE-1	BF Batten 1800mm Twin c/w 3HR Emergency	6000 lm	399 lm	58W	103 lm/W

Product Information

Guarantee	5 Years
Emergency Battery Guarantee	1 Year
Colour Appearance (CCT)	4100K
IP Rating	IP40
IK Rating	IK03
Emergency Battery Type	Ni-Cd
Voltage	230V
Material (Body/Housing)	Steel
Material (Diffuser/Cover)	Polycarbonate
Colour Rendition (CRI)	Ra > 80

Colour Finish	White
LED Life Expectancy	L70B50 50,000 Hours
Power Factor	0.95
Frequency	50/60Hz
Driver Type	Fixed Output
Approval	UKCA & CE
Electrical Class	Class I
Working Temperature	0°C to 45°C
EM Working Temperature	0°C to 45°C

BF BATTEN

LED SURFACE BATTEN FITTING

Packaging Information

Dimensions (mm)	L: 1795 x W: 109 x D: 82 mm
Product Net Weight (kg)	3.68 kg
Barcode	5055807617987
Box Dimensions (mm)	L: 1801 x W: 114 x D: 85 mm
Box Gross Weight (kg)	3.83 kg

Units/Outer Carton	4
Outer Carton Barcode	15055807617984
Outer Carton Dimensions (mm)	L: 1820 x W: 250 x D: 200 mm
Outer Carton Gross Weight (kg)	16.8 kg

