


DLSMD


CCT SELECTABLE DOWNLIGHT

Delivering low glare and comfortable lighting, DLSMD includes the benefit of colour temperature selection. This offers contractors and end users free choice at the time of installation.

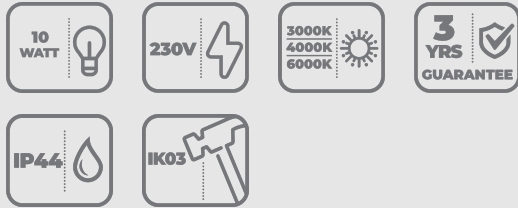

Features

- Colour temperature selectable 3000K / 4000K / 6000K
- Built-in dimmable driver (leading /trailing edge)
- Wide angle, comfortable low glare lighting

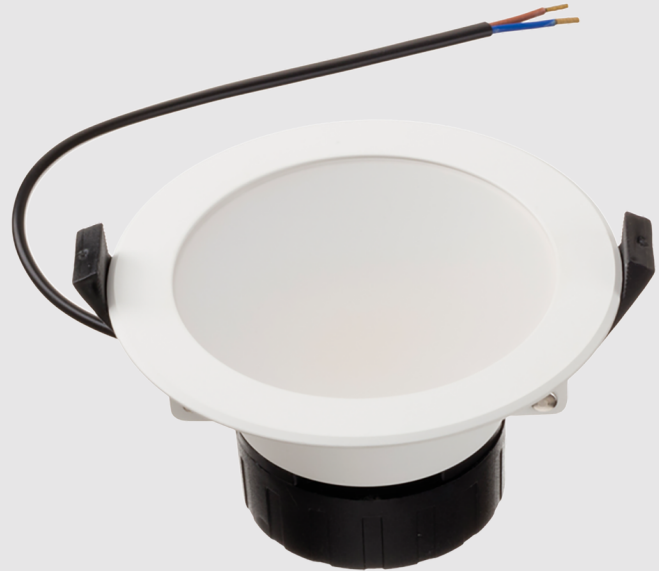

Specification

Code	Description	Lumen Output	Emergency Lumen Output	Wattage	Efficacy
DLSMDW10W-CCT	DLSMD CCT Selectable Downlight	850 lm		10W	85 lm/W

Product Information

Guarantee	3 Years
Colour Appearance (CCT)	3000K/ 4000K/ 6000K
IP Rating	IP44
IK Rating	IK03
Voltage	230V
Material (Body/Housing)	Polycarbonate
Material (Diffuser/Cover)	Styrene
Colour Rendition (CRI)	Ra > 80

Colour Finish	White
LED Life Expectancy	L70B50 30,000 Hours
Power Factor	0.9
Frequency	50/60Hz
Driver Type	Phase Cut Dimmable
Approval	UKCA CE
Working Temperature	-20°C to 45°C

DLSMD

CCT SELECTABLE DOWNLIGHT

Packaging Information

Dimensions (mm)	Ø: 110 x D: 63 mm
Product Net Weight (kg)	0.15 kg
Barcode	5055807618731
Box Dimensions (mm)	L: 110 x W: 110 x D: 90 mm
Box Gross Weight (kg)	0.19 kg

Units/Outer Carton	50
Outer Carton Barcode	15055807618738
Outer Carton Dimensions (mm)	L: 580 x W: 480 x D: 240 mm
Outer Carton Gross Weight (kg)	10.25 kg

