

DISCUS

ULTRA-SLIM WATTAGE SELECTABLE LUMINAIRE



Discus is a smart, stylish range of fittings, available in dimming, wattage selectable & wattage selectable with PIR sensor. All have an adjustable bracket to enable installation into existing cut-outs of 65-205mm, or surface mount.

Features

- Ultra thin profile design - only 18mm deep
- Adjustable surface & semi-recessed mounting bracket - wall or ceiling mount
- Wattage selectable for variable lumen output
- Pre-wired 30cm cable included
- Integral PIR sensor version available
- Dimmable option



Code	Description	Lumen Output	Emergency Lumen Output	Wattage	Efficacy
DSC1018-40	Discus Wattage Selectable	950 / 1350 / 1500 lm	-	10W / 15W / 18W	95 / 90 / 83 lm/W
DSC1018PIR-40	Discus Wattage Selectable with PIR Sensor	950 / 1350 / 1500 lm	-	10W / 15W / 18W	95 / 90 / 83 lm/W
DSC18D-40	Discus Dimmable	1450 lm	-	18W	81 lm/W

DISCUS

ULTRA-SLIM WATTAGE SELECTABLE LUMINAIRE

Specification

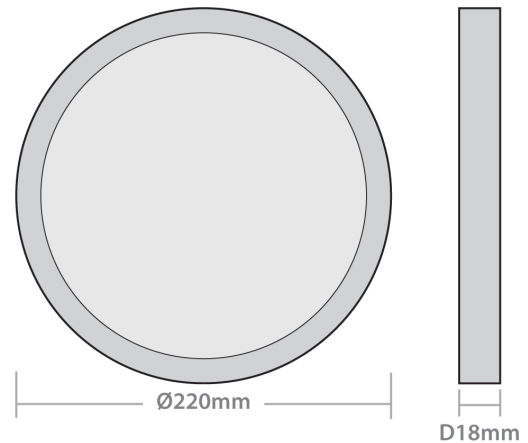
Material:-	Aluminium (Cover - Styrene)
Guarantee:-	3 Years
Colour Temperature:-	4000K
IK Rating:-	IK04

IP Rating:-	IP20
LED Lifetime:-	L80B50 25,000 Hours
CRI:-	Ra > 80
Working Temperature:-	-25°C to 40°C


Maximum Fittings Per Circuit

Automatic Circuit Breaker Type:	B6	B10	B13	B16	B20	C10	C13	C16	C20
Rated Current:	6A	10A	13A	16A	20A	10A	13A	16A	20A
Cable (mm):	1.5	1.5	1.5	1.5	2.5	1.5	1.5	1.5	2.5
DSC18D-40	60	100	100	100	160	100	100	100	160
DSC1018-40 & DSC1018PIR-40 (10W)	60	105	105	105	175	105	105	105	175
DSC1018-40 & DSC1018PIR-40 (15W)	41	70	70	70	118	70	70	70	118
DSC1018-40 & DSC1018PIR-40 (18W)	35	60	60	60	100	60	60	60	100

Dimensions

UK
CA

CE


www.redarrowelectrical.co.uk