

DISCUS MAX

CCT & WATTAGE SELECTABLE LUMINAIRE



Another slim, smart downlight to add to the Discus family. Discus Max is also wattage selectable but has the added bonus of also being colour temperature selectable too. Discus Max can easily replace existing downlights with the innovative adjustable bracket included, to fit cut outs of 65-310mm.



Features

- Wattage selectable for variable lumen output
- CCT colour temperature selectable
- Integral PIR sensor version
- Surface mount and innovative adjustable bracket, to fit cut outs 65mm-310mm

Code	Description	Lumen Output	Emergency Lumen Output	Wattage	Efficacy
DSM1528-CCT	Discus Max Wattage + CCT Selectable	15W: 1200-1400 lm 22W: 1800-2000 lm 28W: 2300-2500 lm	-	15W / 22W / 28W	15W: 80-93 lm/W 22W: 81-90 lm/W 28W: 82-89 lm/W
DSM1528PIR-CCT	Discus Max Wattage + CCT Selectable with PIR	15W: 1200-1400 lm 22W: 1800-2000 lm 28W: 2300-2500 lm	-	15W / 22W / 28W	15W: 80-93 lm/W 22W: 81-90 lm/W 28W: 82-89 lm/W

DISCUS MAX

CCT & WATTAGE SELECTABLE LUMINAIRE

Specification

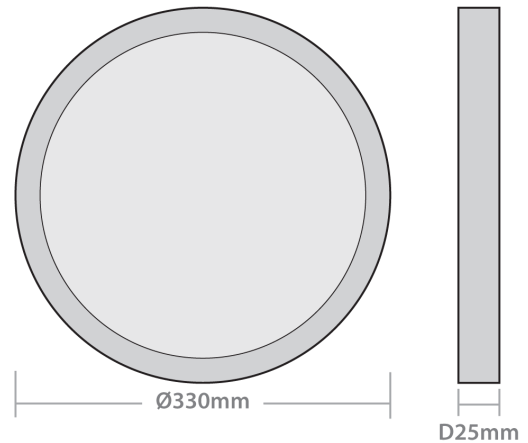
Material:-	Polycarbonate (Cover - Styrene)
Guarantee:-	3 Years
Colour Temperature:-	3000K / 4000K / 5700K
IK Rating:-	IK04
IP Rating:-	IP20



LED Lifetime:-	L80B50 30,000 Hours
CRI:-	Ra > 80
Working Temperature:-	-20°C to 40°C
Power Factor:-	>0.9

Maximum Fittings Per Circuit

Automatic Circuit Breaker Type:	B6	B10	B13	B16	B20	C10	C13	C16	C20
Rated Current:	6A	10A	13A	16A	20A	10A	13A	16A	20A
Cable (mm):	1.5	1.5	1.5	1.5	2.5	1.5	1.5	1.5	2.5
DSM1528-CCT & DSM1528PIR-CCT (15W)	69	103	103	103	172	103	103	103	172
DSM1528-CCT & DSM1528PIR-CCT (22W)	47	70	70	70	117	70	70	70	117
DSM1528-CCT & DSM128PIR-CCT (28W)	37	55	55	55	92	55	55	55	92

Dimensions


**UK
CA**

CE

www.redarrowelectrical.co.uk