


# FLAC SITE SLIMLINE FLOODS

## 110V SLIMLINE FLOODLIGHT

FLAC site floodlights are lightweight, yet robust, thanks to die-cast aluminium construction. Using cost effective driver-on-board technology, the range offers high efficacy and value for money.

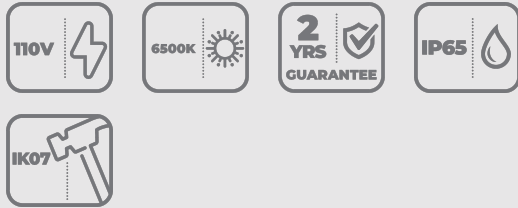

### Features

- Ultra slim, lightweight design
- Bracket allows 360° adjustment
- High efficacy 95 lm/W
- Built in surge protection
- Pre-wired with 1m cable



### Specification

Code	Description	Lumen Output	Emergency Lumen Output	Wattage	Efficacy
FLAC100Y	FLAC Site Floodlight 100W	9500 lm		100W	95 lm/W

### Product Information

Guarantee	2 Years
Colour Appearance (CCT)	6500K
IP Rating	IP65
IK Rating	IK07
Voltage	110V
Material (Body/Housing)	Die-Cast Aluminium
Material (Diffuser/Cover)	Tempered Glass
Colour Rendition (CRI)	Ra 80

Colour Finish	Yellow
LED Life Expectancy	L70B50 30,000 Hours
Power Factor	0.9
Frequency	50Hz
Driver Type	Fixed Output
Approval	UKCA & CE
Electrical Class	Class I
Working Temperature	-20°C to 45°C



# FLAC SITE SLIMLINE FLOODS

## 110V SLIMLINE FLOODLIGHT

### Packaging Information

Dimensions (mm)	L: 290 x W: 230 x D: 41 mm
Product Net Weight (kg)	1.32 kg
Barcode	5055807620734
Box Dimensions (mm)	L: 323 x W: 243 x D: 45 mm
Box Gross Weight (kg)	1.4 kg

Units/Outer Carton	10
Outer Carton Barcode	15055807620731
Outer Carton Dimensions (mm)	L: 470 x W: 338 x D: 258 mm
Outer Carton Gross Weight (kg)	14.8 kg

