


FLAC

SLIMLINE FLOODLIGHTS

The FLAC floodlight offers a comprehensive range of outputs, colour temperature and automatic controls. This versatility, combined with driver-on-board technology, pre-wired cable and tilted, angled mounting bracket makes FLAC extremely cost effective.

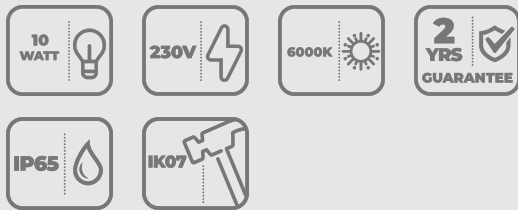

Features

- Comprehensive range to suit virtually any application
- Choice of IP65 PIR and photocell control options.
- Pre-wired with 1m cable for fast, convenient installation
- Handy, angled mounting bracket



Specification

Code	Description	Lumen Output	Emergency Lumen Output	Wattage	Efficacy
FLAC10B	10W FLAC Floodlight 6000K	800 lm		10W	80 lm/W

Product Information

Guarantee	2 Years	Colour Finish	Black
Colour Appearance (CCT)	6000K	LED Life Expectancy	L70B50 30,000 Hours
IP Rating	IP65	Power Factor	>0.9
IK Rating	IK07	Frequency	50Hz
Voltage	230V	Driver Type	Fixed Output
Material (Body/Housing)	Die-Cast Aluminium	Approval	UKCA CE
Material (Diffuser/Cover)	Glass	Electrical Class	Class I
Colour Rendition (CRI)	Ra > 80	Working Temperature	-20°C to 45°C



FLAC

SLIMLINE FLOODLIGHTS

Packaging Information

Dimensions (mm)	L: 83 x W: 103 x D: 24 mm
Product Net Weight (kg)	0.24 kg
Barcode	5055807619394
Box Dimensions (mm)	L: 115 x W: 110 x D: 28 mm
Box Gross Weight (kg)	0.3 kg

Units/Outer Carton	50
Outer Carton Barcode	15055807619391
Outer Carton Dimensions (mm)	L: 680 x W: 360 x D: 140 mm
Outer Carton Gross Weight (kg)	12.09 kg

