


FLAC WITH PIR

SLIMLINE FLOODLIGHTS WITH PIR

The FLAC floodlight offers a comprehensive range of outputs, colour temperature and automatic controls. This versatility, combined with driver-on-board technology, pre-wired cable and tilted, angled mounting bracket makes FLAC extremely cost effective.

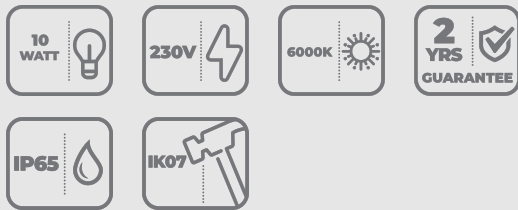

Features

- Integral PIR for on/off security operation
- Tough die-cast aluminium construction & IP65 waterproof
- Innovative driver on board technology
- Pre-wired with 1m cable for fast, convenient installation
- Handy, angled mounting bracket



Specification

Code	Description	Lumen Output	Emergency Lumen Output	Wattage	Efficacy
FLAC10BPIR	10W FLAC Floodlight with PIR	800 lm		10W	80 lm/W

Product Information

Guarantee	2 Years
Colour Appearance (CCT)	6000K
IP Rating	IP65
IK Rating	IK07
Voltage	230V
Material (Body/Housing)	Die-Cast Aluminium
Material (Diffuser/Cover)	Glass
Colour Rendition (CRI)	Ra > 80

Colour Finish	Black
LED Life Expectancy	L70B50 30,000 Hours
Power Factor	>0.9
Frequency	50Hz
Driver Type	Fixed Output
Approval	UKCA CE
Electrical Class	Class I
Working Temperature	-20°C to 45°C



FLAC WITH PIR

SLIMLINE FLOODLIGHTS WITH PIR

Packaging Information

Dimensions (mm)	L: 155 x W: 103 x D: 50 mm
Product Net Weight (kg)	0.31 kg
Barcode	5055807619400
Box Dimensions (mm)	L: 110 x W: 160 x D: 60 mm
Box Gross Weight (kg)	0.4 kg

Units/Outer Carton	50
Outer Carton Barcode	15055807619407
Outer Carton Dimensions (mm)	L: 570 x W: 630 x D: 190 mm
Outer Carton Gross Weight (kg)	20.3 kg

