


FLAC

SLIMLINE FLOODLIGHTS

The FLAC floodlight offers a comprehensive range of outputs, colour temperature and automatic controls. This versatility, combined with driver-on-board technology, pre-wired cable and tilted, angled mounting bracket makes FLAC extremely cost effective.

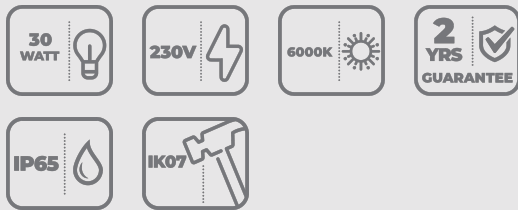

Features

- Comprehensive range to suit virtually any application
- Choice of IP65 PIR and photocell control options.
- Pre-wired with 1m cable for fast, convenient installation
- Handy, angled mounting bracket



Specification

Code	Description	Lumen Output	Emergency Lumen Output	Wattage	Efficacy
FLAC30B	30W FLAC Floodlight 6000K	2400 lm		30W	80 lm/W

Product Information

Guarantee	2 Years
Colour Appearance (CCT)	6000K
IP Rating	IP65
IK Rating	IK07
Voltage	230V
Material (Body/Housing)	Die-Cast Aluminium
Material (Diffuser/Cover)	Glass
Colour Rendition (CRI)	Ra > 80

Colour Finish	Black
LED Life Expectancy	L70B50 30,000 Hours
Power Factor	>0.9
Frequency	50Hz
Driver Type	Fixed Output
Approval	UKCA CE
Electrical Class	Class I
Working Temperature	-20°C to 45°C



FLAC

SLIMLINE FLOODLIGHTS

Packaging Information

Dimensions (mm)	L: 122 x W: 160 x D: 25 mm
Product Net Weight (kg)	0.5 kg
Barcode	5055807619431
Box Dimensions (mm)	L: 190 x W: 155 x D: 30 mm
Box Gross Weight (kg)	0.55 kg

Units/Outer Carton	20
Outer Carton Barcode	15055807619438
Outer Carton Dimensions (mm)	L: 400 x W: 330 x D: 175 mm
Outer Carton Gross Weight (kg)	11.8 kg

