


FLSMD SITE FLOODS

MULTI-VOLTAGE

FLSMD is a range of tough and robust floodlights designed for site applications. Featuring a multi-voltage supply driver, FLSMD can be used in virtually any project.

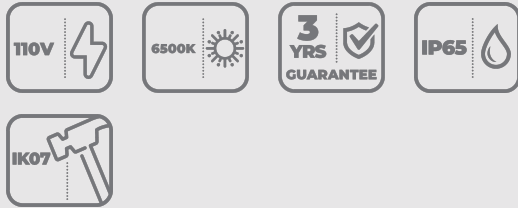

Features

- Symmetrical 120° distribution
- Convenient multi-voltage drivers
- Tough die-cast construction
- Pre-wired with 1m cable



Specification

Code	Description	Lumen Output	Emergency Lumen Output	Wattage	Efficacy
FLSMD100Y-1	FLSMD Site Floodlight 100W	8000 lm		100W	80 lm/W

Product Information

Guarantee	3 Years
Colour Appearance (CCT)	6500K
IP Rating	IP65
IK Rating	IK07
Voltage	110V
Material (Body/Housing)	Die-Cast Aluminium
Material (Diffuser/Cover)	Tempered Glass
Colour Rendition (CRI)	Ra 70

Colour Finish	Yellow
LED Life Expectancy	L70B50 35,000 Hours
Power Factor	0.9
Frequency	50/60Hz
Driver Type	Fixed Output
Approval	UKCA & CE
Electrical Class	Class I
Working Temperature	-20°C to 40°C

FLSMD SITE FLOODS

MULTI-VOLTAGE

Packaging Information

Dimensions (mm)	L: 330 x W: 320 x D: 90 mm
Product Net Weight (kg)	3.64 kg
Barcode	5055807620116
Box Dimensions (mm)	L: 340 x W: 330 x D: 110 mm
Box Gross Weight (kg)	3.45 kg

Units/Outer Carton	4
Outer Carton Barcode	15055807620113
Outer Carton Dimensions (mm)	L: 455 x W: 360 x D: 350 mm
Outer Carton Gross Weight (kg)	16.64 kg

