


FLSMD

AREA FLOODLIGHTS

Designed for general area floodlighting applications, FLSMD floods provide a robust and reliable solution. The heavy duty die-cast housing is fitted with a multi-voltage driver, making the range suitable for 110V as well as 230V supply projects.

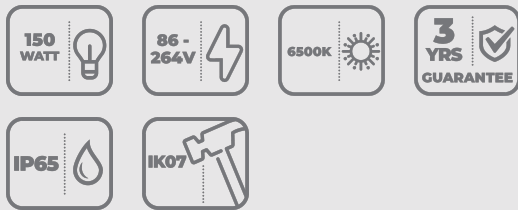

Features

- Suitable for use with 110V AC and 230V AC power supply as standard
- Heavy duty housing and mounting bracket
- PIR & Photocell options available
- Pre-wired with 1m cable for convenient installation



Specification

Code	Description	Lumen Output	Emergency Lumen Output	Wattage	Efficacy
FLSMD150B-1	150W FLSMD Floodlight	12,000 lm		150W	80 lm/W

Product Information

Guarantee	3 Years
Colour Appearance (CCT)	6500K
IP Rating	IP65
IK Rating	IK07
Voltage	86 - 264V
Material (Body/Housing)	Die-Cast Aluminium
Material (Diffuser/Cover)	Glass
Colour Rendition (CRI)	Ra > 70

Colour Finish	Black
LED Life Expectancy	L70B50 35,000 Hours
Power Factor	0.9
Frequency	50/60Hz
Driver Type	Fixed Output
Approval	UKCA CE
Electrical Class	Class I
Working Temperature	-20°C to 40°C



FLSMD

AREA FLOODLIGHTS

Packaging Information

Dimensions (mm)	L: 365 x W: 360 x D: 95 mm
Product Net Weight (kg)	4.6 kg
Barcode	5055807618496
Box Dimensions (mm)	L: 375 x W: 375 x D: 120 mm
Box Gross Weight (kg)	5.2 kg

Units/Outer Carton	2
Outer Carton Barcode	15055807618493
Outer Carton Dimensions (mm)	L: 385 x W: 275 x D: 400 mm
Outer Carton Gross Weight (kg)	10.75 kg

