


FLSMD WITH PHOTOCELL

AREA FLOODLIGHTS WITH PHOTOCELL

Designed for general area floodlighting applications, FLSMD floods provide a robust and reliable solution. The heavy duty die-cast housing is fitted with a multi-voltage driver, making the range suitable for 110V as well as 230V supply projects.

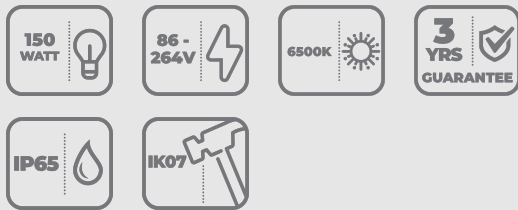

Features

- Suitable for use with 110V AC and 230V AC power supply as standard
- Heavy duty housing and mounting bracket
- PIR & Photocell options available
- Pre-wired with 1m cable for convenient installation



Specification

Code	Description	Lumen Output	Emergency Lumen Output	Wattage	Efficacy
FLSMD150BPC-1	150W FLSMD Floodlight with Photocell	12,000 lm		150W	80 lm/W

Product Information

Guarantee	3 Years
Colour Appearance (CCT)	6500K
IP Rating	IP65
IK Rating	IK07
Voltage	86 - 264V
Material (Body/Housing)	Die-Cast Aluminium
Material (Diffuser/Cover)	Glass
Colour Rendition (CRI)	Ra > 80

Colour Finish	Black
LED Life Expectancy	L70B50 35,000 Hours
Power Factor	0.9
Frequency	50/60Hz
Driver Type	Fixed Output
Approval	UKCA CE
Electrical Class	Class I
Working Temperature	-20°C to 40°C



FLSMD WITH PHOTOCELL

AREA FLOODLIGHTS WITH PHOTOCELL

Packaging Information

Dimensions (mm)	L: 365 x W: 360 x D: 95 mm
Product Net Weight (kg)	4.95 kg
Barcode	5055807618502
Box Dimensions (mm)	L: 380 x W: 380 x D: 125 mm
Box Gross Weight (kg)	5.45 kg

Units/Outer Carton	2
Outer Carton Barcode	15055807618509
Outer Carton Dimensions (mm)	L: 490 x W: 275 x D: 445 mm
Outer Carton Gross Weight (kg)	11.4 kg

