



HI-LO BAY


LINEAR HIGH OUTPUT LUMINAIRES

Our linear Hi-Lo Bay is a versatile solution for many applications. Fitted as standard with dimmable multi-voltage drivers and supplied with a wire suspension kit, the range offers significant energy saving benefits.



Features

- Suitable for warehouses, factories and more
- High efficacy 148 lm/W
- Robust water and dustproof construction
- Optional opal diffusers, lighting controls and emergency conversion

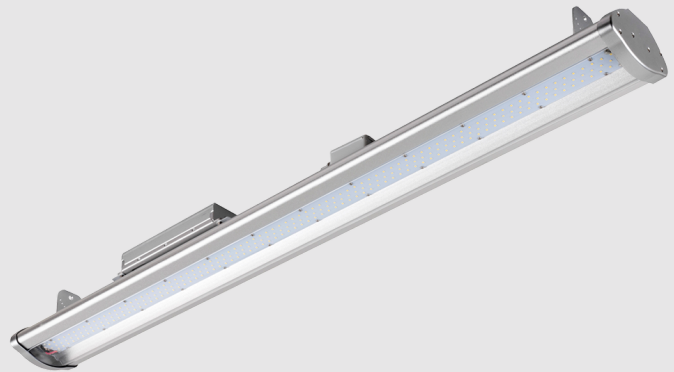

Specification

Code	Description	Lumen Output	Emergency Lumen Output	Wattage	Efficacy
HLB4200W-60	Linear Hi-Lo Bay 1200mm	26,430 lm		200W	132 lm/W

Product Information

Guarantee	5 Years
On-Site Warranty	2 Years
Colour Appearance (CCT)	6000K
IP Rating	IP65
IK Rating	IK10
Voltage	100-240V
Material (Body/Housing)	Extruded Aluminium
Material (Diffuser/Cover)	Polycarbonate
Colour Rendition (CRI)	Ra > 80

Colour Finish	Satin Silver
LED Life Expectancy	L70B50 50,000 Hours
Power Factor	>0.92
Frequency	50/60Hz
Driver Type	1 - 10V Dimmable
Approval	UKCA CE
Electrical Class	Class I
Working Temperature	-30°C to 50°C



HI-LO BAY

LINEAR HIGH OUTPUT LUMINAIRES

Packaging Information

Dimensions (mm)	L: 1205 x W: 135 x D: 125 mm
Product Net Weight (kg)	5.67 kg
Barcode	5055807620314
Box Dimensions (mm)	L: 1250 x W: 160 x D: 140 mm
Box Gross Weight (kg)	6.2 kg

Units/Outer Carton	1
Outer Carton Dimensions (mm)	L: 1250 x W: 160 x D: 140 mm
Outer Carton Gross Weight (kg)	6.75 kg

