

POLO X

IP65 SLIM BULKHEAD



POLO X is the new, improved version of the popular POLO range. Featuring upgraded IP65 rating and UV stabilised construction as standard, suitable for outdoor as well as indoor applications.



Features

- Stylish, sleek bulkhead
- UV stabilised- suitable for outdoor applications
- Excellent IP65 rating
- Aesthetically pleasing halo effect
- Emergency & microwave options

Code	Description	Lumen Output	Emergency Lumen Output	Wattage	Efficacy
POLX13	POLO X Bulkhead	1300 lm	-	13W	100 lm/W
POLX13/MS	POLO X c/w Microwave Sensor	1300 lm	-	13W	100 lm/W
POLX13/MSCF	POLO X c/w Microwave Sensor & Corridor Function	1300 lm	-	13W	100 lm/W
POLX13E	POLO X c/w 3HR Emergency	1300 lm	145 lm	13W	100 lm/W
POLX13E/MS	POLO X c/w Microwave Sensor & 3HR Emergency	1300 lm	145 lm	13W	100 lm/W
POLX13E/MSCF	POLO X c/w Microwave Sensor & Corridor Function & 3HR Emergency	1300 lm	145 lm	13W	100 lm/W

POLO X

IP65 SLIM BULKHEAD

Specification

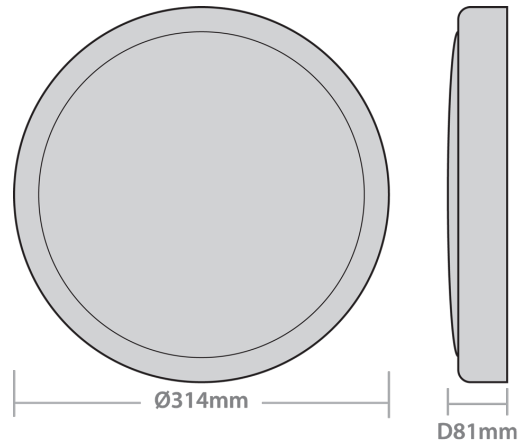
Material:-	Polycarbonate Body & Diffuser
Guarantee:-	5 Years
Colour Finish:-	White RAL9016
Colour Temperature:-	4000K
IK Rating:-	IK08




IP Rating:-	IP65
LED Lifetime:-	L80B50 30,000 Hours
CRI:-	Ra > 80
Working Temperature:-	-20°C to 40°C (Emergency Versions 0°C to 40°C)
Power Factor:-	0.75/0.8/0.9

Maximum Fittings Per Circuit

Automatic Circuit Breaker Type:	B6	B10	B13	B16	B20	C10	C13	C16	C20
Rated Current:	6A	10A	13A	16A	20A	10A	13A	16A	20A
Cable (mm):	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	2.5
POLX13	40	70	90	120	150	70	90	120	150
POLX13E	35	65	85	110	140	65	85	110	140
POLX13/MS	40	70	90	120	150	70	90	120	150
POLX13E/MS	35	65	85	110	140	65	85	110	140
POLX13/MSCF	40	70	90	120	150	70	90	120	150
POLX13E/MSCF	35	65	85	110	140	65	85	110	140

Dimensions


**UK
CA**

CE

www.redarrowelectrical.co.uk