

RHOMBUS PRO LOW GLARE

HIGH EFFICACY TP(A) BACK-LIT PANEL



Rhombus Pro Low Glare features a high performance microprism diffuser. This is ideal to assist projects that require to achieve UGR<19. All products also feature TP(a) diffusers and Philips drivers.



Features

- Excellent efficacy - up to 140 lm/W
- TP(a) microprism diffuser to assist with UGR<19 compliance
- Wide range of modular sizes
- Choice of CCT and lumen output
- Emergency options, surface & mount kits available

Code	Description	Lumen Output	Emergency Lumen Output	Wattage	Efficacy
RBM6628-30	Rhombus Pro 600mm x 600mm High Output UGR<19	3640 lm	-	28W	130 lm/W
RBM6628-40	Rhombus Pro 600mm x 600mm High Output UGR<19	3640 lm	-	28W	130 lm/W
RBM6628-60	Rhombus Pro 600mm x 600mm High Output UGR<19	3640 lm	-	28W	130 lm/W
RBM12328-30	Rhombus Pro 300mm x 1200mm High Output UGR<19	3360 lm	-	28W	120 lm/W
RBM12328-40	Rhombus Pro 300mm x 1200mm High Output UGR<19	3360 lm	-	28W	120 lm/W
RBM12328-60	Rhombus Pro 300mm x 1200mm High Output UGR<19	3360 lm	-	28W	120 lm/W
RBM12644-30	Rhombus Pro 600mm x 1200mm High Output UGR<19	5200 lm	-	44W	130 lm/W
RBM12644-40	Rhombus Pro 600mm x 1200mm High Output UGR<19	5200 lm	-	44W	130 lm/W
RBM12644-60	Rhombus Pro 600mm x 1200mm High Output UGR<19	5200 lm	-	44W	130 lm/W
RBM12640-30	Rhombus Pro 600mm x 1200mm High Output UGR<19	5600 lm	-	40W	140 lm/W
RBM12640-40	Rhombus Pro 600mm x 1200mm High Output UGR<19	5600 lm	-	40W	140 lm/W
RBM12640-60	Rhombus Pro 600mm x 1200mm High Output UGR<19	5600 lm	-	40W	140 lm/W



RHOMBUS PRO LOW GLARE

HIGH EFFICACY TP(A) BACK-LIT PANEL

Specification

Material:-	Body: Steel & Aluminium, Frame: Aluminium, Diffuser: TP(a) rated Polystyrene
Guarantee:-	7 Years
Colour Temperature:-	3000K, 4000K & 6000K
IK Rating:-	IK03
IP Rating:-	IP40

LED Lifetime:-	L80B50 50,000 Hours
CRI:-	Ra > 80
Working Temperature:-	-20°C to 45°C
Power Factor:-	>0.9

Maximum Fittings Per Circuit

Automatic Circuit Breaker Type:	B6	B10	B13	B16	B20	C10	C13	C16	C20
Rated Current:	6A	10A	13A	16A	20A	10A	13A	16A	20A
Cable (mm):	1.5	1.5	1.5	1.5	2.5	1.5	1.5	1.5	2.5
RBM6628-30/40/60	12	33	54	83	129	54	91	141	215
RBM12644-30/40/60	8	21	35	53	82	34	58	90	137
RBM12328-30/40/60	12	33	54	83	129	54	91	141	215

Dimensions


Product Code	Dimensions
RBM6628	L: 595 x W: 595 x D: 26mm
RBM12644	L: 1195 x W: 595 x D: 32mm
RBM12328	L: 1195 x W: 295 x D: 26mm

Accessories



Product Code	Description	Emergency Battery Type	Barcodes
TITANX/4/KIT	Titan X Remote Emergency 4W	LiFePO4	5055807625258
TITANX/4/KIT/ST	Titan X Remote Emergency 4W Self Test	LiFePO4	5055807625272
RB/SUS	Rhombus Suspension Kit 2pcs 1.8m Y Splitter	-	5055807626057



For details of Titan kits please go to the website

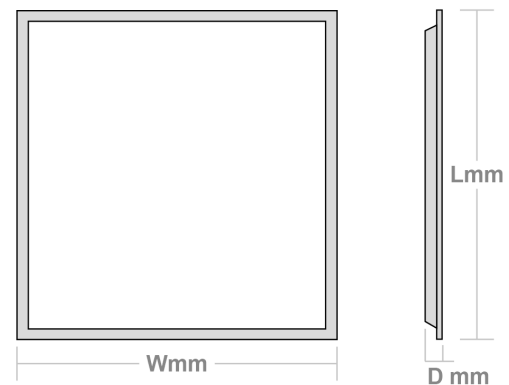

UK
CA



www.redarrowelectrical.co.uk