




RHOMBUS PRO

HIGH EFFICACY TP(A) BACK-LIT PANEL

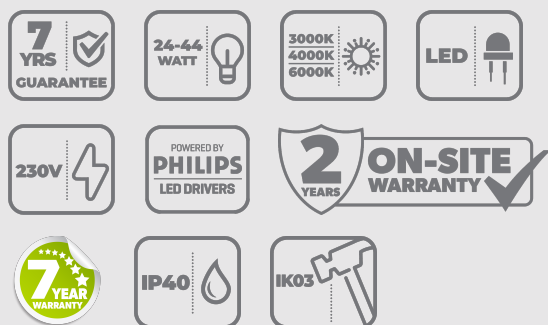

Delivering outstanding efficacy and in a wide range of options, Rhombus Pro offers the perfect solution for any commercial application. All feature TP(a) diffusers and Philips drivers as standard.

Features

- Excellent efficacy - up to 140 lm/W
- TP(a) diffusers as standard
- Emergency options & surface mount kits available



Code	Description	Lumen Output	Emergency Lumen Output	Wattage	Efficacy
RBP6624-40	Rhombus Pro 600mm x 600mm High Efficiency	3100 lm	-	24W	130 lm/W
RBP6624-60	Rhombus Pro 600mm x 600mm High Efficiency	3100 lm	-	24W	130 lm/W
RBP6628-30	Rhombus Pro 600mm x 600mm High Output	3640 lm	-	28W	130 lm/W
RBP6628-40	Rhombus Pro 600mm x 600mm High Output	3640 lm	-	28W	130 lm/W
RBP6628-60	Rhombus Pro 600mm x 600mm High Output	3640 lm	-	28W	130 lm/W
RBP12328-30	Rhombus Pro 300mm x 1200mm High Output	3640 lm	-	28W	130 lm/W
RBP12328-40	Rhombus Pro 300mm x 1200mm High Output	3640 lm	-	28W	130 lm/W
RBP12328-60	Rhombus Pro 300mm x 1200mm High Output	3640 lm	-	28W	130 lm/W
RBP12644-30	Rhombus Pro 600mm x 1200mm High Output	5720 lm	-	44W	130 lm/W
RBP12644-40	Rhombus Pro 600mm x 1200mm High Output	5720 lm	-	44W	130 lm/W
RBP12644-60	Rhombus Pro 600mm x 1200mm High Output	5720 lm	-	44W	130 lm/W
RBP12640-30	Rhombus Pro 600mm x 1200mm High Output	5600 lm	-	40W	140 lm/W
RBP12640-40	Rhombus Pro 600mm x 1200mm High Output	5600 lm	-	40W	140 lm/W
RBP12640-60	Rhombus Pro 600mm x 1200mm High Output	5600 lm	-	40W	140 LM/w

RHOMBUS PRO

HIGH EFFICACY TP(A) BACK-LIT PANEL

Specification

Material:-	Body: Steel & Aluminium, Frame: Aluminium, Diffuser: TP(a) rated Polystyrene
Guarantee:-	7 Years
Colour Temperature:-	3000K, 4000K & 6000K
IK Rating:-	IK03
IP Rating:-	IP40

LED Lifetime:-	L80B50 50,000 Hours
CRI:-	Ra > 80
Working Temperature:-	-20°C to 45°C
Power Factor:-	>0.9

Maximum Fittings Per Circuit

Automatic Circuit Breaker Type:	B6	B10	B13	B16	B20	C10	C13	C16	C20
Rated Current:	6A	10A	13A	16A	20A	10A	13A	16A	20A
Cable (mm):	1.5	1.5	1.5	1.5	2.5	1.5	1.5	1.5	2.5
RBP6624-40/60	14	38	64	97	151	63	106	164	251
RBP6628-30/40/60	12	33	54	83	129	54	91	141	215
RBP12644-30/40/60	12	33	54	83	129	54	91	141	215
RBP12328-30/40/60	8	21	35	53	82	34	58	90	137

Dimensions


Product Code	Dimensions
RBP6624	L: 595 x W: 595 x D: 26mm
RBP6628	L: 595 x W: 595 x D: 26mm
RBP12644	L: 1195 x W: 595 x D: 32mm
RBP12328	L: 1195 x W: 295 x D: 26mm

Accessories



Product Code	Description	Emergency Battery Type	Barcodes
TITANX/4/KIT	Titan X Remote Emergency 4W	LiFePO4	5055807625258
TITANX/4/KIT/ST	Titan X Remote Emergency 4W Self Test	LiFePO4	5055807625272
RB/SUS	Rhombus Suspension Kit 2pcs 1.8m Y Splitter	-	5055807626057



For details of Titan kits please go to the website

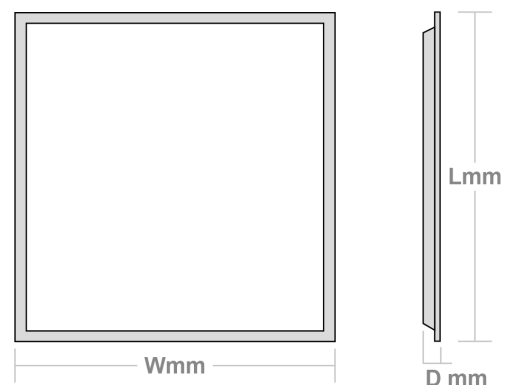

UK
CA



www.redarrowelectrical.co.uk

Tel: 0114 279 8999 | Email: sales@redarrowelectrical.co.uk | redarrowelectrical.co.uk

Red Arrow Electrical Ltd, Cortonwood Drive, Brampton, Barnsley, S73 0UF

This document is uncontrolled if printed, all information is subject to change. Generated on 06/05/24