
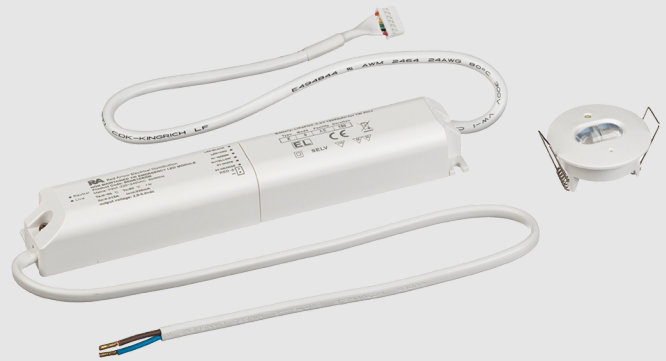


SENTINEL HIGH PERFORMANCE

HIGH PERFORMANCE EMERGENCY

The Sentinel range offers exceptional performance thanks to the specially designed optics, particularly for escape route applications. Wider spacing means less fittings are required, saving both time and money on any installation.

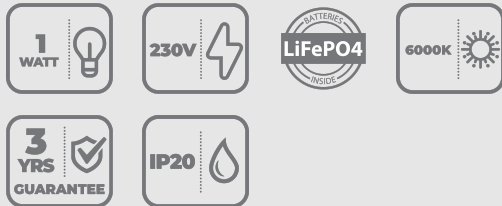

Features

- High performance optics
- Saves time and money - less fittings required
- Discreet recessed head
- High output 3W surface option
- Advanced LiFePO4 battery technology

Specification

Code	Description	Lumen Output	Emergency Lumen Output	Wattage	Efficacy
SENR1ERNM	Sentinel 1W Recessed Downlight Escape Route Lens	130 lm (N/M)	130 lm	1W	

Product Information

Guarantee	3 Years	Colour Finish	White
Colour Appearance (CCT)	6000K	LED Life Expectancy	L70B50 50,000 Hours
IP Rating	IP20	Frequency	50/60Hz
Emergency Battery Type	LiFePO4	Approval	UKCA CE
Voltage	230V	Electrical Class	Class II
Material (Body/Housing)	Polycarbonate	Working Temperature	0°C to 45°C
Colour Rendition (CRI)	Ra > 70	EM Working Temperature	0°C to 45°C



SENTINEL HIGH PERFORMANCE

HIGH PERFORMANCE EMERGENCY

Packaging Information

Dimensions (mm)	Emergency Module: L: 173 x W: 30 D: 23 mm Head: Ø: 40 x D:23 mm
Product Net Weight (kg)	0.15 kg
Barcode	5055807620970
Box Dimensions (mm)	L: 240 x W: 45 x D: 30 mm
Box Gross Weight (kg)	0.17 kg

Units/Outer Carton	40
Outer Carton Barcode	15055807620977
Outer Carton Dimensions (mm)	L: 385 x W: 260 x D: 180 mm
Outer Carton Gross Weight (kg)	7.05 kg

