




SENTINEL HIGH PERFORMANCE

HIGH PERFORMANCE EMERGENCY

The Sentinel range offers exceptional performance thanks to the specially designed optics, particularly for escape route applications. Wider spacing means less fittings are required, saving both time and money on any installation.

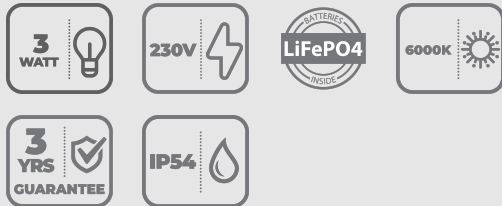

Features

- High performance optics
- Saves time and money - less fittings required
- Discreet recessed head
- High output 3W surface option
- Advanced LiFePO4 battery technology

Specification

| Code | Description | Lumen Output | Emergency Lumen Output | Wattage | Efficacy |
|-----------|-------------------------------------------------|--------------|------------------------|---------|----------|
| SENS3ERNM | Sentinel 3W Surface Downlight Escape Route Lens | 210 lm (N/M) | 210 lm | 3W | |

Product Information

| | | | |
|-------------------------|---------------|------------------------|---------------------|
| Guarantee | 3 Years | Colour Finish | White |
| Colour Appearance (CCT) | 6000K | LED Life Expectancy | L70B50 50,000 Hours |
| IP Rating | IP54 | Frequency | 50/60Hz |
| Emergency Battery Type | LiFePO4 | Approval | UKCA CE |
| Voltage | 230V | Electrical Class | Class II |
| Material (Body/Housing) | Polycarbonate | Working Temperature | 0°C to 45°C |
| Colour Rendition (CRI) | Ra > 70 | EM Working Temperature | 0°C to 45°C |



SENTINEL HIGH PERFORMANCE

HIGH PERFORMANCE EMERGENCY

Packaging Information

| | |
|-------------------------|----------------------------|
| Dimensions (mm) | L: 130 x W: 130 x D: 35 mm |
| Product Net Weight (kg) | 0.25 kg |
| Barcode | 5055807620994 |
| Box Dimensions (mm) | L: 160 x W: 132 x D: 37 mm |
| Box Gross Weight (kg) | 0.28 kg |

| | |
|--------------------------------|-----------------------------|
| Units/Outer Carton | 40 |
| Outer Carton Barcode | 15055807620991 |
| Outer Carton Dimensions (mm) | L: 545 x W: 340 x D: 220 mm |
| Outer Carton Gross Weight (kg) | 12.35 kg |

