

WILSON X

SLIM HIGH EFFICACY BULKHEAD



Wilson X is the new improved version of the popular Wilson slim profile bulkhead. Featuring increased lumen output and improved efficacy, it is ideal for stairwells and circulation areas.

Features

- Slim profile with opal diffuser
- Improved lumen output of 2600 lm
- Choice of chrome and white bezel
- Suitable for wall and ceiling mounting



Code	Description	Lumen Output	Emergency Lumen Output	Wattage	Efficacy
WLX25	Wilson X White Bulkhead	2600 lm	-	25W	104 lm/W
WLX25/C	Wilson X Chrome Bulkhead	2600 lm	-	25W	104 lm/W
WLX25/MS	Wilson X White Bulkhead c/w Microwave Sensor	2600 lm	-	25W	104 lm/W
WLX25E	Wilson X White Bulkhead c/w 3HR Emergency	2600 lm	150 lm	25W	104 lm/W
WLX25E/C	Wilson X Chrome Bulkhead c/w 3HR Emergency	2600 lm	150 lm	25W	104 lm/W
WLX25E/MS	Wilson X White Bulkhead c/w Microwave Sensor & 3HR Emergency	2600 lm	150 lm	25W	104 lm/W



WILSON X

SLIM HIGH EFFICACY BULKHEAD

Specification




Material:-	Body: Steel, Diffuser: Polycarbonate
Guarantee:-	5 Years
Colour Finish:-	White RAL9010/Chrome
Colour Temperature:-	4000K
IK Rating:-	IK04
IP Rating:-	IP20

LED Lifetime:-	L80B50 30,000 Hours
CRI:-	Ra > 80
Working Temperature:-	-20°C to 40°C (Emergency Version 0°C to 40°C)
Emergency Battery Type:-	LiFePO4
Power Factor:-	0.75/0.8/0.85/0.9

Maximum Fittings Per Circuit

Automatic Circuit Breaker Type:	B6	B10	B13	B16	B20	C10	C13	C16	C20
Rated Current:	6A	10A	13A	16A	20A	10A	13A	16A	20A
Cable (mm):	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	2.5
WLX25	25	40	50	60	80	40	50	60	80
WLX25/C	25	40	50	60	80	40	50	60	80
WLX25E	20	35	45	50	70	35	45	50	70
WLX25E/C	20	35	45	50	70	35	45	50	70
WLX25/MS	25	40	50	60	80	40	50	60	80
WLX25E/MS	20	35	45	50	70	35	45	50	70

Dimensions

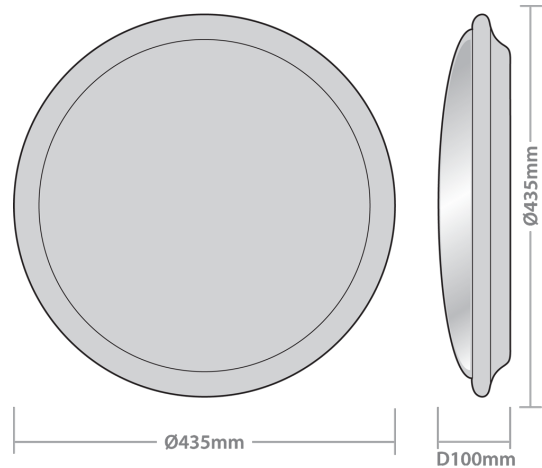

www.redarrowelectrical.co.uk

Tel: 0114 279 8999

Email: sales@redarrowelectrical.co.uk

redarrowelectrical.co.uk

Red Arrow Electrical Ltd, Cortonwood Drive, Brampton, Barnsley, S73 0UF