

ZENITH


ARCHITECTURAL WALLPACK

Zenith combines attractive aesthetics with high performance, in a practical robust housing that is suitable for any public space. The lens provides even illumination with the benefit of selectable lumen output and choice of 3000K or 4000K.



Features

- Attractive architectural design
- Selectable lumen output and colour temperature to suit any project
- Tamper resistant screws to lens
- Integral photocell and emergency options
- Contemporary RAL7016 Anthracite Finish

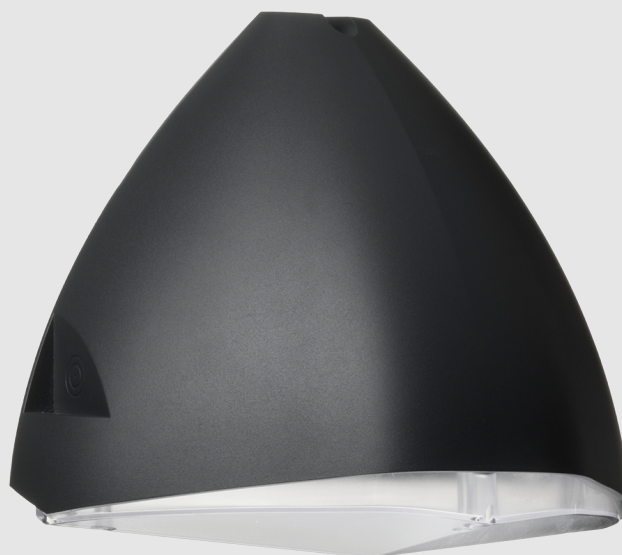

Specification

Code	Description	Lumen Output	Emergency Lumen Output	Wattage	Efficacy
ZENAPC-CCT	Zenith Architectural Wallpack with Selectable Wattage and CCT with integral photocell	1700 lm / 2500 lm / 3500 lm		13W / 18W / 28W	131 lm/W / 139 lm/W / 125 lm/W

Product Information

Guarantee	7 Years
On-Site Warranty	2 Years
Colour Appearance (CCT)	3000K / 4000K
IP Rating	IP65
IK Rating	IK10
Voltage	230V
Material (Body/Housing)	Die-Cast Aluminium
Material (Diffuser/Cover)	Polycarbonate
Colour Rendition (CRI)	Ra > 80

Colour Finish	RAL7016 Anthracite
LED Life Expectancy	L80B50 > 54,000 Hours
Power Factor	>0.9
Frequency	50/60Hz
Driver Type	Selectable Output
Approval	UKCA CE
Electrical Class	Class I
Working Temperature	-20°C to 40°C

ZENITH

ARCHITECTURAL WALLPACK

Packaging Information

Dimensions (mm)	L: 265 x W: 319 x D: 165 mm
Product Net Weight (kg)	1.9 kg
Barcode	5055807623223
Box Dimensions (mm)	L: 300 x W: 360 x D: 180 mm
Box Gross Weight (kg)	2.5 kg

Units/Outer Carton	4
Outer Carton Barcode	15055807623220
Outer Carton Dimensions (mm)	L: 630 x W: 380 x D: 390 mm
Outer Carton Gross Weight (kg)	11.1 kg

